



SPORT UTILITY STROLLER SUN SHIELD INSTRUCTIONS

(800) 893-2447 www.bobgear.com email- info@bobgear.com Ph: (208) 375-5171
Fax: (208) 375-5172, BOB Trailers, Inc. 5475 Gage St. Boise, ID 83706

Congratulations on your purchase of the BOB Sun Shield. It is designed to protect your child's delicate eyes and skin from heat, glare, and ultraviolet (UVA/UVB) rays. It also provides protection from wind and flying insects. Proper installation and care will provide years of reliable service.

Before attempting to use or attach your new Sun Shield, read and understand these instructions completely to insure proper assembly and operation. If you are unclear on any point, contact your dealer or BOB before use.

⚠ WARNINGS ⚠

- This product is designed exclusively for use with BOB Sport Utility, Sport Utility D'Lux and Ironman strollers. It is not intended for use with other strollers or products.
- The Sun Shield is not designed to work with optional Infant Car Seat Adapter and car seat.
- Never leave child unattended.
- The Sun Shield reduces the exposure to sun and heat but does not eliminate it. Avoid exposing your child to prolonged sun and heat.
- It is possible for small insects to enter through the small gaps between the shield and the stroller.
- When not in use, keep out of reach of children.
- When the Sun Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper air flow and ventilation for your child.

INSTALLATION INSTRUCTIONS:

1. Set stroller Parking Brake (refer to Parking Brake section of stroller Owner's Manual). Place sun canopy into position to receive the Sun Shield as shown in Fig.1.

2. Pull canopy drawstring in order to gather extra material under canopy. Cinch cord lock against canopy to retract and hold material, as shown in Fig. 2.

Very Important: When the Sun Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper air flow and ventilation for your child.

3. Locate rear canopy flap and fold forward. Attach canopy flap Velcro on flap to respective Velcro mate on top outboard side of each canopy as shown in Fig. 3). Warning tag on rear canopy flap also describes and illustrates this critical step.

4. Inspect opening at back of stroller to make sure the air passage between top of seat back and canopy is unobstructed (see Fig. 4). We recommend reclining each seat back slightly to optimize airflow (refer to Reclining Seat section of stroller Owner's Manual).

5. Place Sun Shield on the stroller so the rear flap drapes over back (between the handlebar) and the seam above the window is aligned with the forward Sun Canopy support (see Fig. 5).

6. Stretch the elastic cord on each side under each respective black shock knob as shown in Fig. 6. There is an opening mid way up each side (with silver reflective fabric on each



Fig. 1 Canopy Supports in position.



Fig. 5 Shield placed on Canopy



Fig. 2 Canopy Drawstring Adjustment

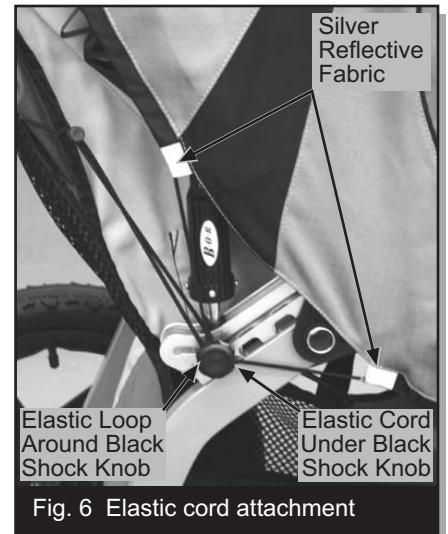


Fig. 6 Elastic cord attachment



Fig. 3 Canopy Flap in Position

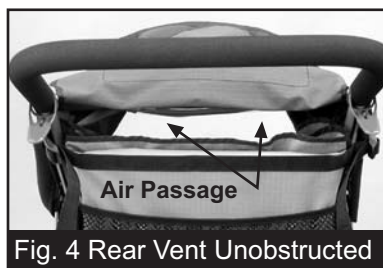


Fig. 4 Rear Vent Unobstructed



Fig. 7 Front attachment: Insert Stay ends into holes.

end) where the elastic cord is exposed.

7. Attach each looped end of the elastic cords (protruding out sides of back flap) around each black shock knob on respective side of stroller, as shown in Fig. 6 (right side shown). The cord locks allow the loop to be enlarged or reduced, thereby adjusting the tension.

8. Locate black plastic end plugs at outboard ends of stroller. Note hole on top of each plug. Locate metal wire stay at front of Sun Shield (see Fig. 7). Pull Sun Shield forward and insert ends of metal stay into holes on the black plastic plugs.

9. Stretch each elastic edge of the Sun Shield and route under each respective side of frame tube as shown in Fig. 8.

10. Center rear flap of Sun Shield on stroller handlebar. Inspect air passage above stroller seat. Make sure air opening is not obstructed (Fig. 9).

11. To place passenger into the stroller, pull the front of the Sun Shield off the front of stroller, then lift up, stretch and roll over the forward edge of stroller canopy as shown in Fig. 10. This will temporarily hold the Sun Shield out of your way while you place the child into the seat.

12. Once your child is secured in the safety harness (refer to your stroller Owner's Manual, Seat Safety Harness section), release the Sun Shield from canopy and re-secure wire stay into holes on end plugs and elastic under frame sides. Fig. 11 shows a Sun Shield correctly installed.



Fig. 8 Elastic properly routed under frame sides and ends.

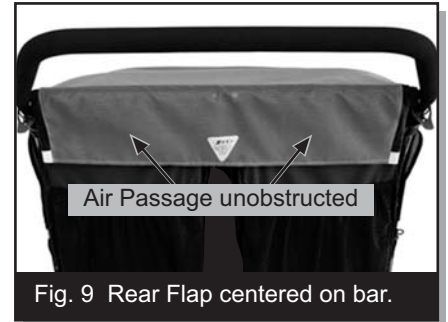


Fig. 9 Rear Flap centered on bar.

CARE INSTRUCTIONS:

Hand wash cold and hang dry. Do not dry clean, iron, or place in dryer.

LIMITED WARRANTY:

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warrant the Sun Shield against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Sun Shield is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB shall in no event be responsible for consequential or special damages.
- This limited warranty is the only express or implied warranty applicable to BOB. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.



Fig. 10 Shield placed on forward edge of canopy



Fig. 11 Shield correctly installed