



Congratulations on your purchase of the BOB Warm Fuzzy. It is designed to provide your child with added comfort. Proper installation and care will provide years of reliable service.

Before attempting to install your new Warm Fuzzy, read and understand these instructions completely to insure proper installation.

If you are unclear on any point, contact your dealer or BOB before use.

Warnings

- It is important the Warm Fuzzy is installed correctly. Improper installation can interfere with the proper function of the safety harness and result in your child not being properly secured in the stroller and possible injury.
- These instructions are written specifically for the installation of the Warm Fuzzy in a BOB Stroller. If you are installing the Warm Fuzzy in another brand of stroller, you need to insure that it is installed correctly and does not interfere with the proper function of the child restraint system. Failure to do so can result in injury to your child.



Fig. 1 Safety Harness System

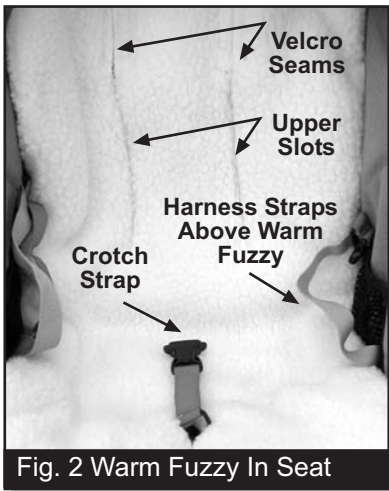


Fig. 2 Warm Fuzzy In Seat

1. Figure 1 illustrates the components of the safety harness system. To correctly install the Warm Fuzzy, proceed as follows:

A) Unfasten the crotch and sternum strap buckles (note older model strollers do not have sternum straps).

B) Position the straps so they are not in the seat area where the Warm Fuzzy will be placed.

2. Place the Warm Fuzzy in the seat so the two parallel upper slots are located on the seat back and the single slot is on the seat bottom as shown in figure 2. Next, locate the crotch strap in figure 2 and route it through the single slot as shown. Make sure harness straps are placed above the Warm Fuzzy.

3. With the harness straps above the Warm Fuzzy, connect the crotch buckles to the crotch strap, as shown in figure 3. Make sure the straps are not twisted.

4. Locate the upper slots in the Warm Fuzzy as shown in figure 2. The area above the slots have a Velcro seam that joins the left and right sides.

A) Open up the Velcro seam and pass the outside flap of the Warm Fuzzy under the harness strap and place strap in the lower part of Warm Fuzzy slot as shown in figure 4.

B) Rejoin the Velcro seam to close the upper portion of the slot. Repeat this sequence for the opposite side. When installed correctly it will look like figure 5.

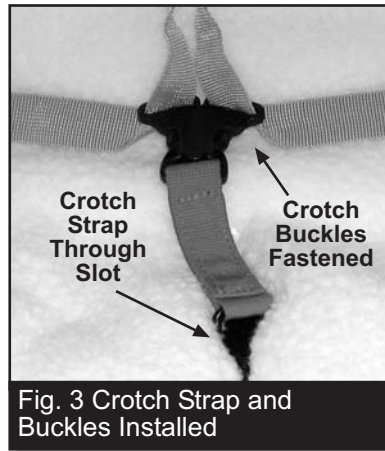


Fig. 3 Crotch Strap and Buckles Installed

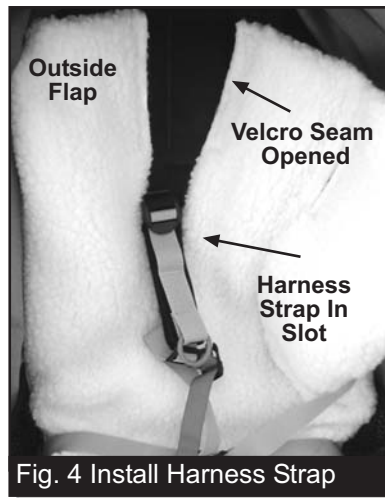


Fig. 4 Install Harness Strap



Fig. 5 Warm Fuzzy Correctly Installed

5. Figure 5 shows the Warm Fuzzy and Safety Harness correctly installed. To properly secure your child in the stroller, refer to the Owner's Manual supplied with your stroller.

CARE INSTRUCTIONS

Hand wash warm, dry flat, do not dry clean or iron.

LIMITED WARRANTY

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warranty the Warm Fuzzy against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Warm Fuzzy is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, and improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB Trailers, Inc. shall in no event be responsible for consequential or special damages.
- This Limited Warranty is the only express or implied warranty applicable to BOB Trailers, Inc. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.