



WARM FUZZY INSTRUCTIONS

(800) 893-2447 www.bobgear.com email- info@bobgear.com Phone: (208) 375-5171 Fax: (208) 375-5172, BOB Trailers, Inc. 5475 Gage St. Boise, Idaho 83706

Congratulations on your purchase of the BOB Warm Fuzzy. It is designed to provide your child with added comfort. Proper installation and care will provide years of reliable service.

Before attempting to install your new Warm Fuzzy, read and understand these instructions completely to insure proper installation. If you are unclear on any point, contact your dealer or BOB before use.

⚠ WARNINGS ⚠

- It is important that the Warm Fuzzy is installed correctly. Improper installation can interfere with the function of the safety harness, resulting in your child not being properly secured and possible injury.
- These instructions are written specifically for the installation of the Warm Fuzzy in a BOB Stroller. If you are installing the Warm Fuzzy in another brand of stroller, you need to insure that it is installed correctly and does not interfere with the proper function of the child restraint system. Failure to do so can result in injury to your child.

INSTALLATION INSTRUCTIONS

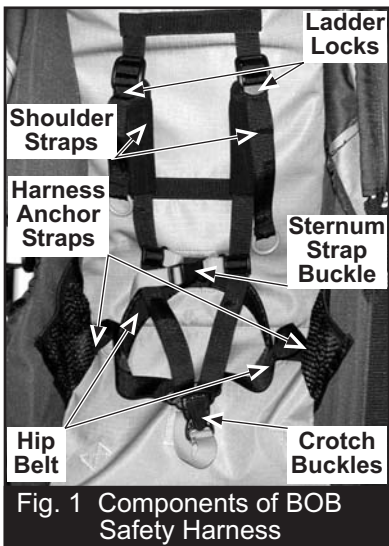


Fig. 1 Components of BOB Safety Harness

1. Fig. 1 illustrates the components of the safety harness system.

Unfasten sternum and crotch strap buckles (older models do not have sternum strap).

2. Unfasten all velcro sections (red on back side) of Warm Fuzzy.

3. Place Warm Fuzzy in the stroller seat, making sure the two parallel slots are placed against the seat back and the single slot is on the seat bottom. Tuck the Warm Fuzzy into the upper and lower corners of the seat back.

4. Locate the crotch strap and route it through the single slot as shown in Fig 2.

5. Route each shoulder strap and ladder lock forward, through upper part of each respective slot on Warm Fuzzy seat back.

6. Route hip belt (older models do not have hip belt) forward, through lower part of each respective parallel slot on Warm Fuzzy seat back.

7. Route harness anchor straps on top and outboard of Warm Fuzzy seat bottom.

8. Align and fasten all four sets (red) velcro fasteners of Warm Fuzzy one at a time.

9. Connect the crotch buckles to the crotch strap, as shown

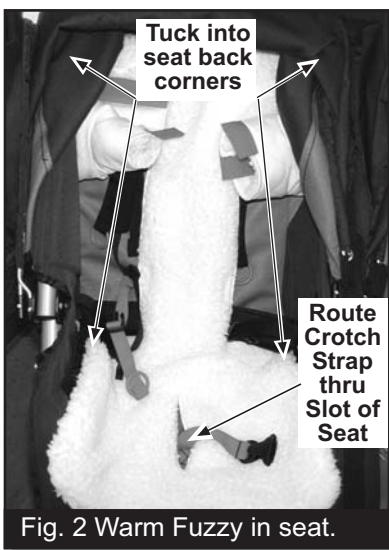


Fig. 2 Warm Fuzzy in seat.



Fig. 3 Crotch Strap and Buckles Installed

in Fig. 3. Make sure the straps are not twisted. Fig. 4 shows the Warm Fuzzy correctly installed with Safety Harness components fully accessible and buckles fastened.

10. To properly secure your child in the stroller, refer to the Seat Safety Harness section of Owner's Manual supplied with your stroller.

CARE INSTRUCTIONS

Hand wash warm, dry flat, do not dry clean or iron.

LIMITED WARRANTY

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warranty the Warm Fuzzy against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Warm Fuzzy is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, and improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB Trailers, Inc. shall in no event be responsible for consequential or special damages.
- This Limited Warranty is the only express or implied warranty applicable to BOB Trailers, Inc. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.



Fig. 4 Warm Fuzzy Correctly Installed